



We are pleased to offer **Three Turnkey Mining Facilities** ready to ship

1 system is a 975 kW Caterpillar 3516 Generator

MEGA POD

- **Capacity:** Houses up to 300 miners
- **Features:** 160,000 CFM exhaust system

Caterpillar 3516 Generator

- **Condition:** Operated at our facility for four months, 6,000 hours
- **Model:** Caterpillar G3516LE
- **Power Output:** 725 kW Continuous Duty
- **Voltage:** 480V Wye, Series
- **RPM:** 1200
- **Amperage:** 1,391 A
- **Insulation:** Class H
- **Maximum Temperature Rise:** 105°C
- **Short Circuit Rating:** 100 KA
- **Generator Breaker:** 1600 Amp

Additional Features

- **Insulated Steel Enclosure** (winchable sub-skid with noise suppression & temperature-controlled)
- **Fuel Gas Scrubber** (with filtration)
- **Transformer with Breaker Panel** (for single-phase loads: lighting, accessories)
- **Engine Coolant Preheat System**
- **Hospital Grade Muffler**

Pricing

\$ \$336,400.00 USD







2 SYSTEM IS

Turnkey Natural Gas Mining Facility for Sale

Waukesha 7042 Generator 975 KW

Generator System

- **Power Source:** Waukesha 7042 Generator
- **Operating Hours:** 3,000 hours of reliable service
- **Capacity:** Powers up to 300 S19 miners (dependent on gas availability and quality)

Data Center Container


- **Model:** Bit-Ram Mega Pod Data Center
- **Capacity:** Houses up to 300 miners
- **Ventilation:** High-capacity 120,000-CFM exhaust system
- **Additional Space:** 6 feet added to include a workstation area
- **Complete Setup:** Includes full electrical connections from the generator to the data center

Pricing

\$ \$336,400.00 USD





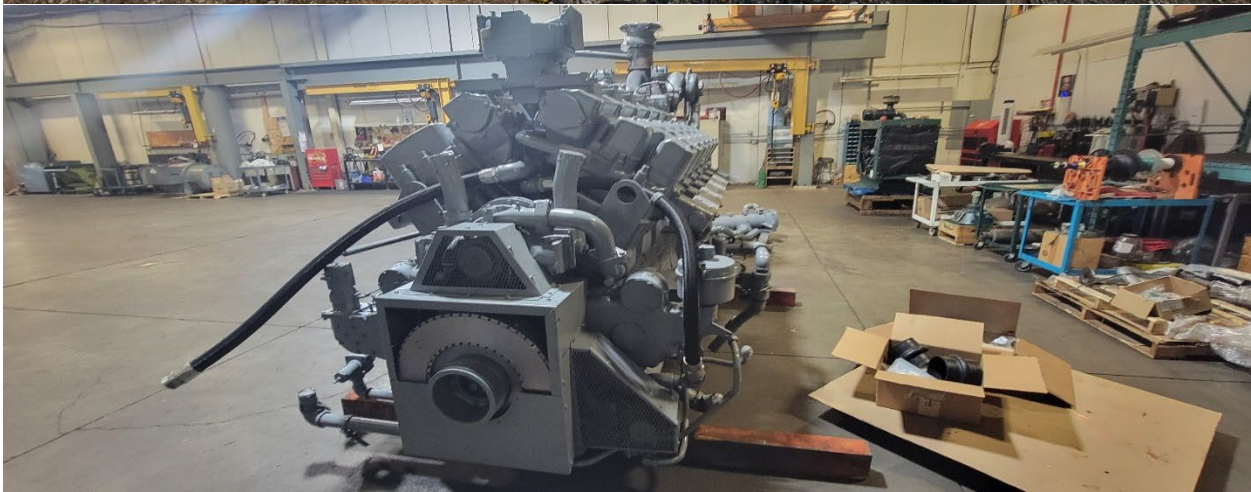



Final system is Waukesha F-11 Generator 155 KW

Generator System

- **Power Source:** Waukesha F-11 Generator
- **Operating Hours:** 6,000 hours of reliable service
- **Capacity:** Powers up to 60 S19 miners (dependent on gas availability and quality)

Data Center Container

- **Model:** Bit-Ram Micro Pod Data Center
- **Capacity:** Houses up to 60 miners
- **Ventilation:** High-capacity 25,000-CFM exhaust system
- **Additional Space:** 6 feet added to include a workstation area
- **Complete Setup:** Includes full electrical connections from the generator to the data center

Pricing

\$ \$54,600.00 USD



IMG_20250130_072447.heic



